


# SHUTTLE ONE

## 4 MODULES

Project name: \_\_\_\_\_

Type: \_\_\_\_\_

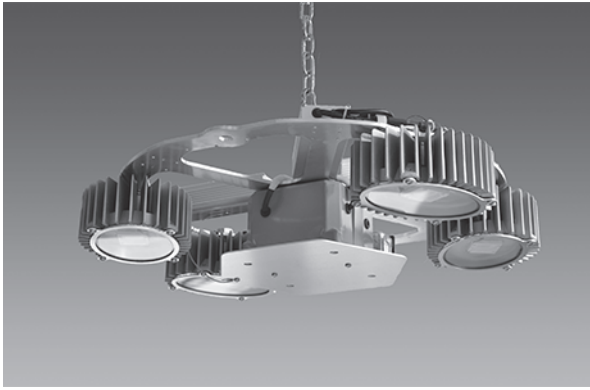

### General information

**Luminaire characteristics:** Nominal at 25°C

**Power input:** Vero: 320W or RS: 328W

**Lumens:** Vero: 45 600 or RS: 40 000 lm

**Luminaire efficacy:** Vero: 143 lm/W, RS: 122 lm/W

**Source:** Bridgelux® LED module, 5000K: 70-80-90 CRI or 4000K: 80-90 CRI (LM-80 tested).

**Lumen maintenance:** The Calculated L70 lumen maintenance of 250 000 hours is based on TM-21 lifetime calculation with >70% of initial lumens. This Calculated L70 lifetime is for the Vero products at case temperature of 85°C and nominal drive current operating condition. LM-79 tested.

**Optics:** General lighting

**Body:** Die-cast aluminum heat sink, aluminum fixation.

**Electrical:** High efficiency electronic power supply, 120V-277V or 347V. MTBF of 175 000 hrs at full load and 25°C ambient.

**Operating temperature:** -40°C to 40°C.

**Dimming:** Power supply compatible with 0-10V dimming.

**Mounting:** Supplied with anchor cable.


**Finish:** Silver.

**Weight:** 39 lbs (17 kg)


**Warranty:** 5 years, refer to warranty statement.

**Certification:** cULus listed and DLC listed.

**Ratings:** IP66, suitable for damp location.

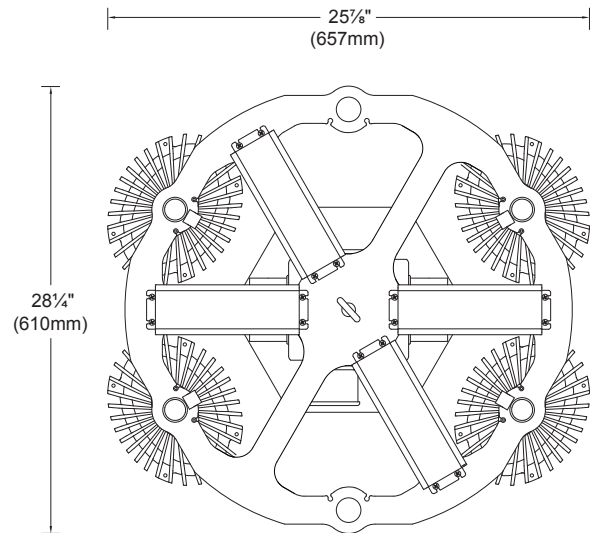

TOP VIEW

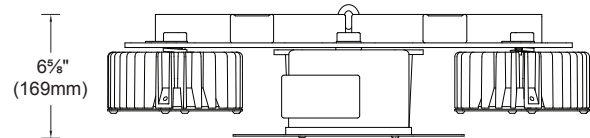

SIDE VIEW

### ORDERING INFO

| MODEL | VOLTAGE                                                                                | FINISH | LED COLOR                                                                              | OPTIC                                                                                                                                | DIMMING                                           | LOCATION                                            | LED                                                                          | CRI                                                                                                                    |
|-------|----------------------------------------------------------------------------------------|--------|----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|-----------------------------------------------------|------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
|       | <b>VOLTAGE</b><br><input type="radio"/> 1 - 120-277V<br><input type="radio"/> 2 - 347V |        | <b>LED COLOR</b><br><input type="radio"/> A - 5000K<br><input type="radio"/> B - 4000K | <b>OPTIC</b><br><input type="radio"/> A - Clear<br><input type="radio"/> C - Frosted<br><input type="radio"/> K - Frosted drop lense | <b>DIMMING</b><br><input type="radio"/> A - 0-10V | <b>LOCATION</b><br><input type="radio"/> A - Indoor | <b>LED</b><br><input type="radio"/> 0 - RS<br><input type="radio"/> 1 - VERO | <b>CRI</b><br><input type="radio"/> 1 - 70 CRI<br><input type="radio"/> 2 - 80 CRI<br><input type="radio"/> 3 - 90 CRI |

DUE TO CONTINUOUS IMPROVEMENTS, THE INFORMATION HEREIN MAY BE CHANGED WITHOUT NOTICE.

LAST UPDATE: AUGUST 31, 2015

FB - R1



9320 Boul. St-Laurent,  
 suite 100, Montréal (Québec)  
 Canada H2N 1N7  
 P.: 514.687.9114 F.: 514.904.1592  
 www.modularledsystems.com